CAR PROTECTION SYSTEMS



TURTLE STANDARD SYSTEM (ROPE VARIANT)

- The round arch enables a continuous emptying. (No hail gets stuck in the net)
- 360° protection against hail.
- Modular system with variable arch diameters (5,0 m / 5,5 m / 6,0 m)
- Variable distance between arches (maximum 6,0 m)
- System height 3,2 m
- Entrance height 2,0 m
- Anchor distance 2,0 m
- Anchor depth 2,0 m
- Certified until hail class 4:
 - Hail diameter: 40 mm
 - Mass: 29,2 g
 - Speed: 99 km/h
- Additional options: driveway with hail net (no opening or closing of the entrances) After the hail hits the net, it rolls into the middle and empties into the driveway.












TURTLE STANDARD SYSTEM (ROPE VARIANT)

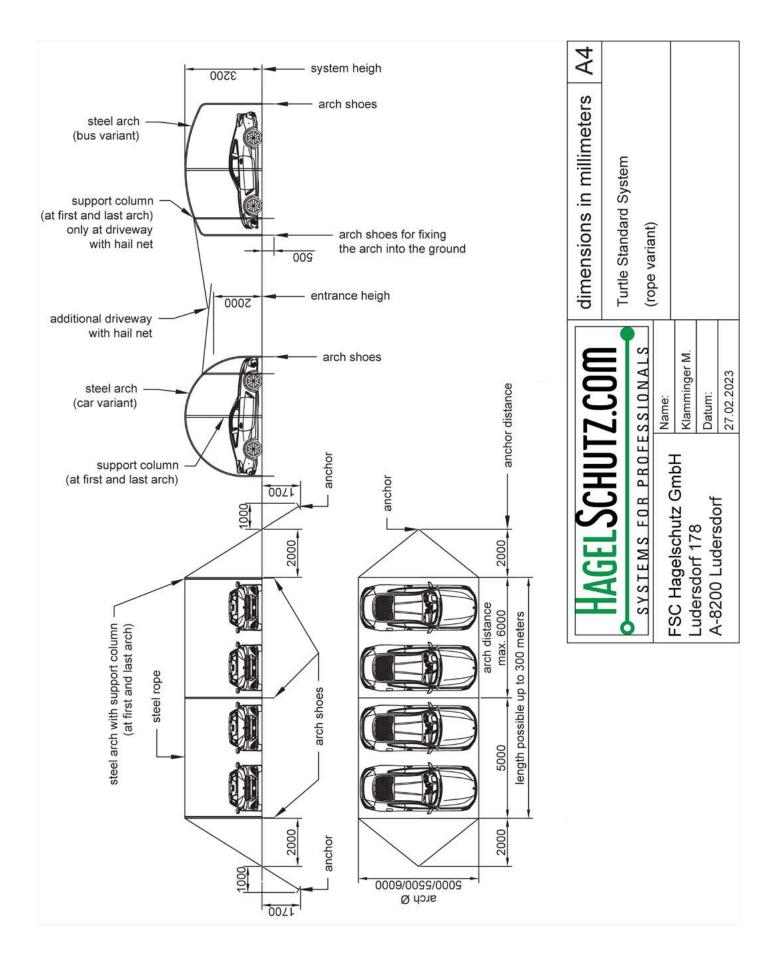

TURTLE STANDARD SYSTEM (TUBE VARIANT)

- The round arch enables a continuous emptying. (No hail gets stuck in the net)
- 360° protection against hail.
- Modular system with variable arch diameters (5,0 m / 5,5 m / 6,0 m)
- Variable distance between arches (maximum 6,0 m)
- System height 3,2 m
- Entrance height 2,0 m
- Anchor distance 0,8 m
- Anchor depth 0,5 m
- Certified until hail class 4:
 - Hail diameter: 40 mm
 - Mass: 29,2 g
 - Speed: 99 km/h
- Additional options: driveway with hail net (no opening or closing of the entrances) After the hail hits the net, it rolls into the middle and empties into the driveway.












TURTLE STANDARD SYSTEM (TUBE VARIANT)

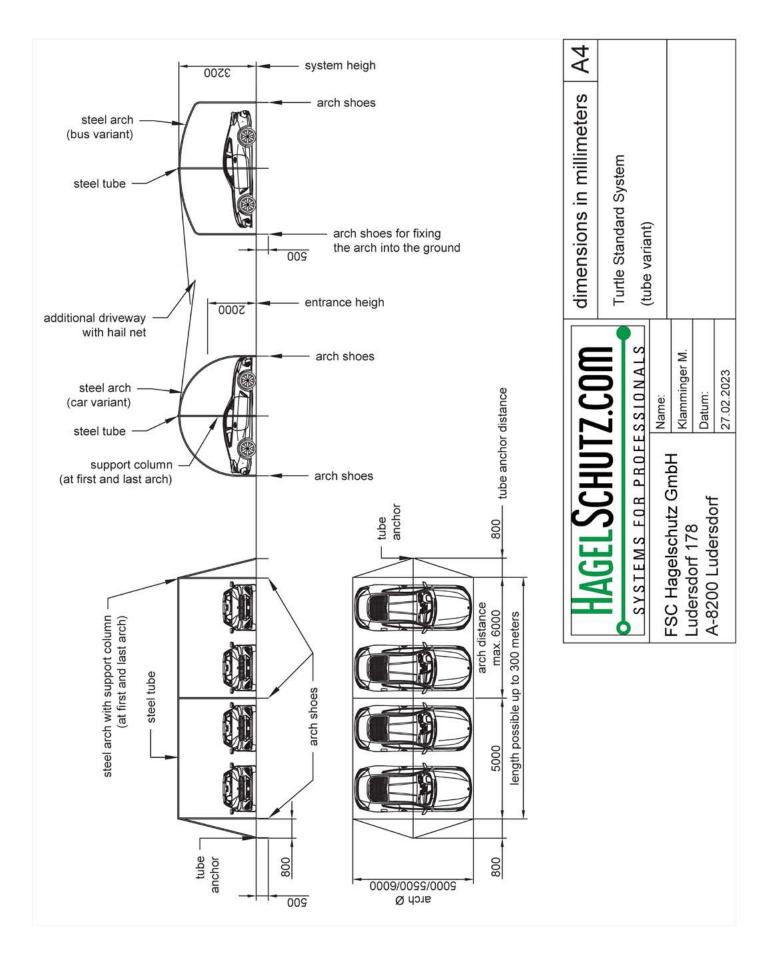

TURTLE TRANSPORTER SYSTEM

- The round arch enables a continuous emptying. (No hail gets stuck in the net)
- 360° protection against hail.
- Modular system with variable arch diameters (6,0 m / 6,5 m / 7,0 m)
- Variable distance between arches (maximum 6,0 m)
- System height 4,5 m
- Entrance height 3,0 m
- Anchor distance 2,5 m
- Anchor depth 2,0 m
- Certified until hail class 4:
 - Hail diameter: 40 mm
 - Mass: 29,2 g
 - Speed: 99 km/h
- Additional options: driveway with hail net (no opening or closing of the entrances) After the hail hits the net, it rolls into the middle and empties into the driveway.
- Hail net elevator: The entrance can be opened with a hand crank.












TURTLE TRANSPORTER SYSTEM

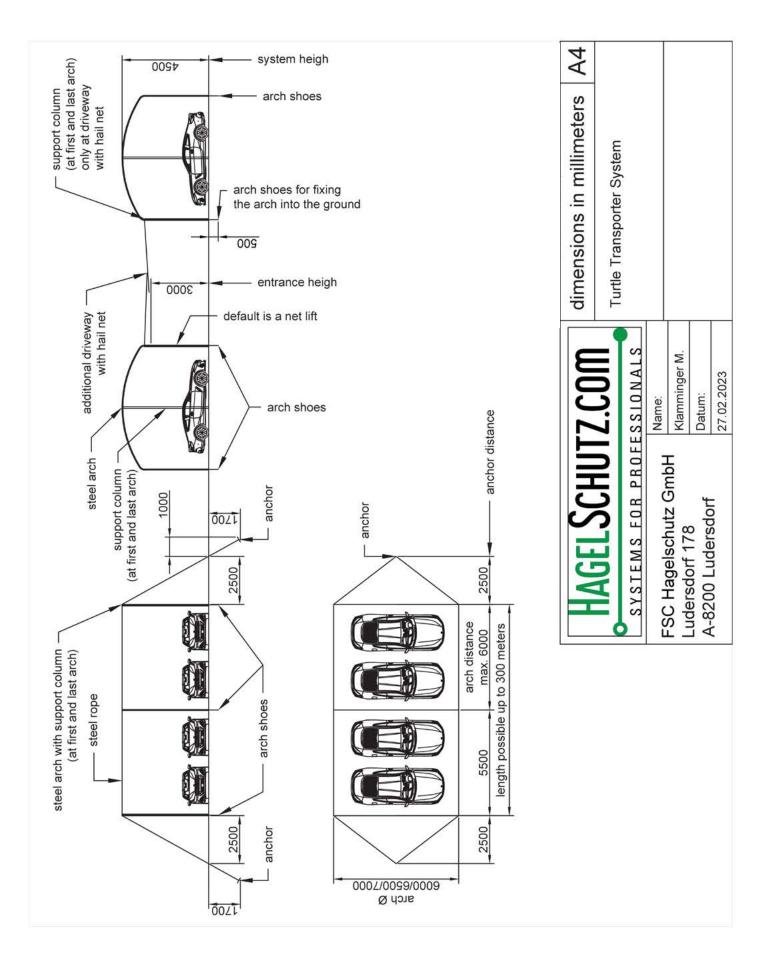

TURTLE CARAVAN SYSTEM

- The round arch enables a continuous emptying. (No hail gets stuck in the net)
- 360° protection against hail.
- Modular system with variable arch diameters (7,0 m / 7,5 m / 8,0 m)
- Variable distance between arches (maximum 6,5 m)
- System height 5,0 m
- Entrance height 3,5 m
- Anchor distance 3,0 m
- Anchor depth 2,0 m
- Support column at each arch
- Certified until hail class 4:
 - Hail diameter: 40 mm
 - Mass: 29,2 g
 - Speed: 99 km/h
- Additional options: driveway with hail net (no opening or closing of the entrances) After the hail hits the net, it rolls into the middle and empties into the driveway.
- Hail net elevator: The entrance can be opened with a hand crank.











TURTLE CARAVAN SYSTEM

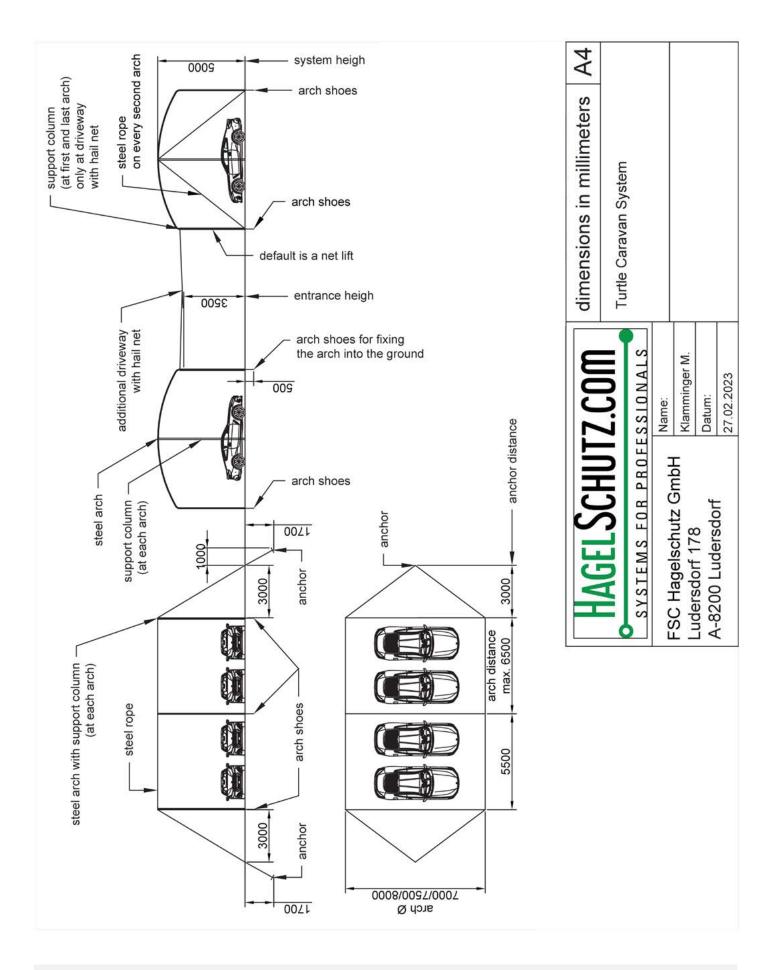

TURTLE SPECIAL SYSTEM (STRAIGHT PARKING)

- The round arch enables a continuous emptying. (No hail gets stuck in the net)
- 360° protection against hail.
- Easy opening and closing due to stirrup system.
- Modular system with variable arch diameters (5,0 m / 5,5 m / 6,0 m)
- Variable distance between arches (maximum 6,0 m)
- System height 4,5 m
- Entrance height 3,0 m
- Certified until hail class 4:
 - Hail diameter: 40 mm
 - Mass: 29,2 g
 - Speed: 99 km/h

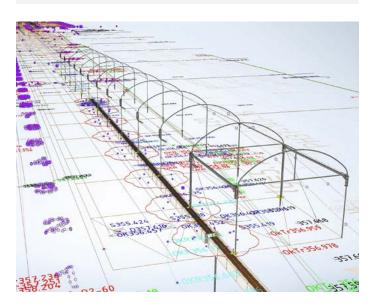











SAFETY PROTECTION

Collision Protection for Arch

- Material: Mash PVC-leather, UV certified, color yellow
- Inner diameter 5 cm, outer diameter 8 cm, height 150 cm

Collision Protection for Column

- Material: Mash PVC-leather, UV certified, color yellow
- Inner diameter 10 cm, outer diameter 12,5 cm, height 150 cm

Tipping Cylinder

- Material: polyethylene, color yellow/black
- Diameter 10 cm, height 100 cm



2

1









Contact details of our head office in Austria:

FSC Hagelschutz GmbH Ludersdorf 178 8200 Ludersdorf-Wilfersdorf Tel. +43 (0) 3178/28 18 9-70 Mobile +43 (0) 664/38 35 120 office@hagelschutz.com